


Parts List:

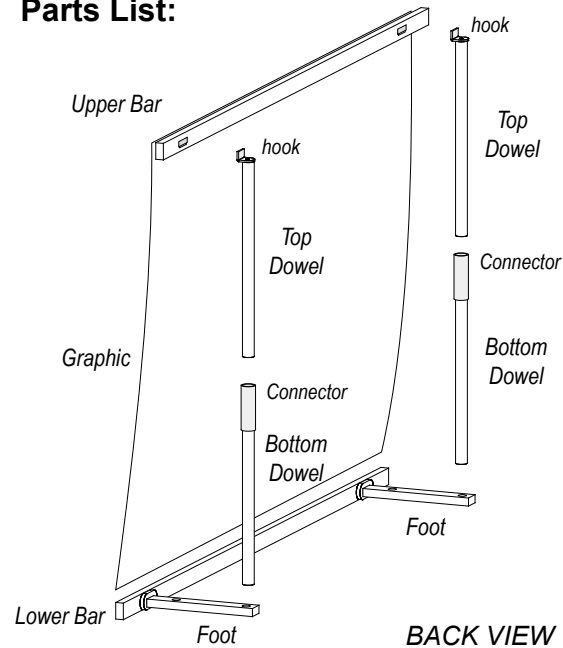

Item	Qty.	Description
--	1	94.5"w Lower Bar
--	2	15.375" Foot
--	2	2-piece Dowel
--	1	94.5"w Upper Bar
--	1	Graphic
--	1	Canvas bag


**Retain all packing materials.
DO NOT DISCARD.**

Two people are
recommended
for assembly.





Assembly:

- ① Insert feet into lower bar.

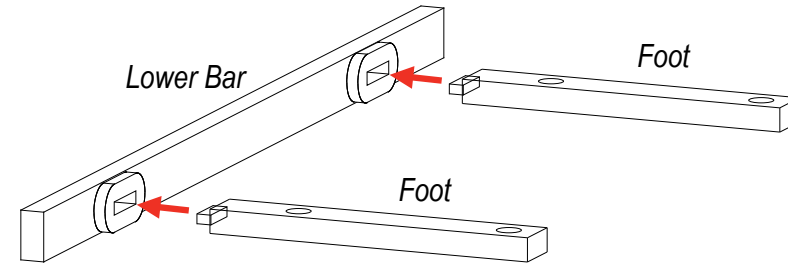


BACK VIEW

- ② Connect top & bottom dowels, then insert bottom dowel into each foot.

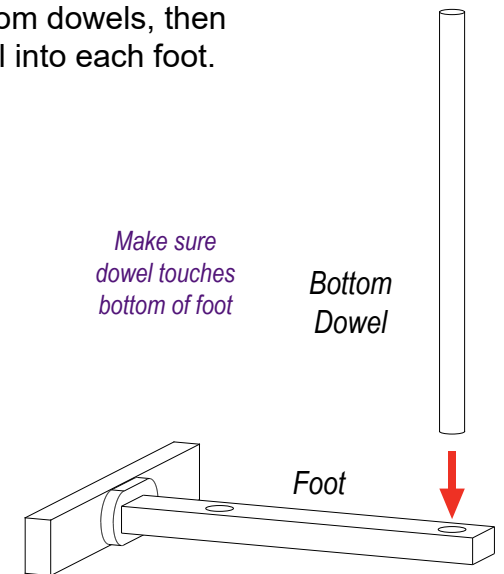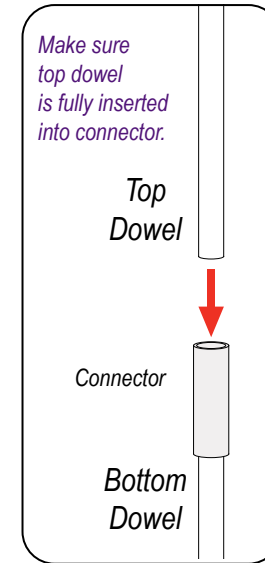

BACK VIEW


- ③ Unroll graphic from upper bar. Lift up bar, then hook top dowels into slots on back of upper bar.

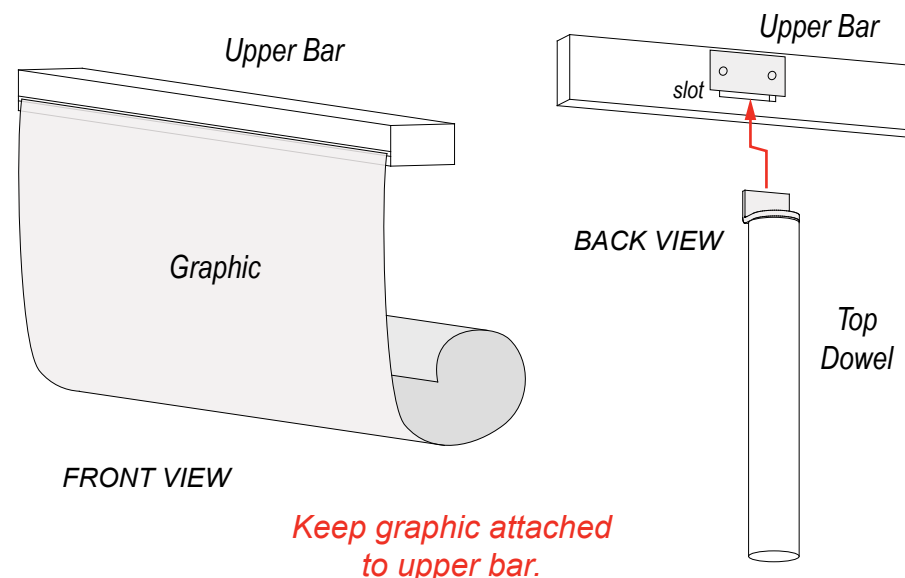

FRONT VIEW

BACK VIEW

- ④ Attach the graphic to groove on lower bar.

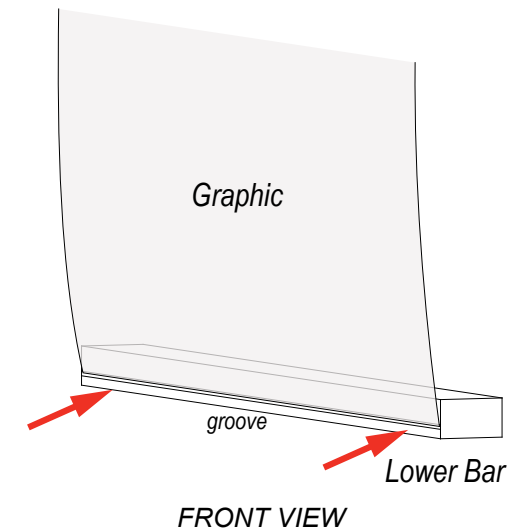

FRONT VIEW

Graphic Installation



Starting at one end of lower bar, insert silicone welt on back of graphic into the front channel.

Fully press the silicone welt into the channel, moving across the lower bar from end to end.

Once the welt is fully inserted, smooth out as needed.



Disassembly:

- 1) Remove bottom silicone welt from groove of lower bar.
- 2) Roll the graphic around upper bar, print side out.
- 3) Detach feet from lower bar & remove dowels.



FRONT VIEW

Assembled banner stand



BACK VIEW



Keep parts in fabric bag provided.

SETUP INSTRUCTIONS